




Green Mode

Meet CEC Regulations & RoHS Compliance
No Load Power Consumption less than 0.5W

ADAPTER-90W

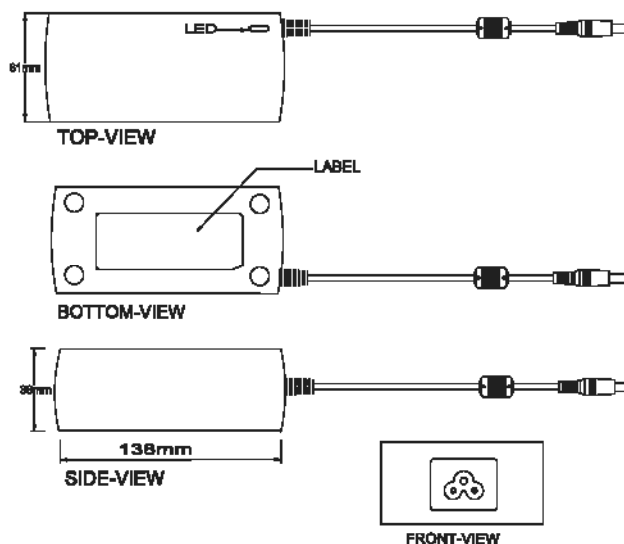

FEATURE

Desktop	IEC 320 / C6
Input Range	90~264V/47~63 Hz
Output	+12V~24V / 3.75A~7A (90W max.)
Efficiency	80% Typical
Protection	Short circuit protection; Over Voltage Protection. Over Current Protection
Load Regulation	±5%
Leakage Current	Less than 3.5mA
M.T.B.F.	50,000 hours min. at 25°C., full load
Cable type	UL1185 / 14AWG or 16AWG
Dimension	138(L) x 61(W) x 36(H) mm
Weight (reference)	415 g
APPLICATION	LCD Monitor, Notebook, Printer, Portable device
SAFTY & EMI	
Safty	UL/ cUL/GS/CB/PSE/BSMI
EMI	CE/FCC Class B, Conduction & Radiation MEET
ENVIRONMENTAL	
Operating Temperature	0~+40°C
Storage Temperature	- 20~+60°C
Relative Humidity	(operating) 20~80% RH (storage) 10~90% RH

RULE OF THE MODEL NAME

MODEL NAME	O/P VOLTAGE	O/P CURRENT	WATT
STD-1207	12V	7.0A	84W
STD-1506	15V	6.0A	90W
STD-1656	16V	5.6A	90W
STD-1805	18V	5.0A	90W

MODEL NAME	O/P VOLTAGE	O/P CURRENT	WATT
STD-1947	19V	4.74A	90W
STD-2045	20V	4.5A	90W
STD-2437	24V	3.75A	90W