




### Green Mode

Meet CEC Regulations & RoHS Compliance  
No Load Power Consumption less than 0.5W

# ADAPTER-90W

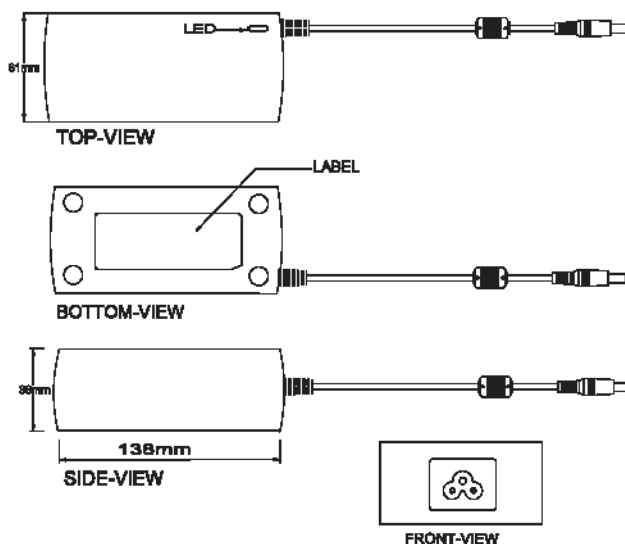

## FEATURE

<b>Desktop</b>	IEC 320 / C6
<b>Input Range</b>	90~264V/47~63 Hz
<b>Output</b>	+12V~24V / 3.75A~7A (90W max.)
<b>Efficiency</b>	80% Typical
<b>Protection</b>	Short circuit protection; Over Voltage Protection. Over Current Protection
<b>Load Regulation</b>	±5%
<b>Leakage Current</b>	Less than 3.5mA
<b>M.T.B.F.</b>	50,000 hours min. at 25°C., full load
<b>Cable type</b>	UL1185 / 14AWG or 16AWG
<b>Dimension</b>	138(L) x 61(W) x 36(H) mm
<b>Weight (reference)</b>	415 g
<b>APPLICATION</b>	LCD Monitor, Notebook, Printer, Portable device
<b>SAFTY &amp; EMI</b>	
<b>Safety</b>	UL/ cUL/GS/CB/PSE/BSMI
<b>EMI</b>	CE/FCC Class B, Conduction & Radiation MEET
<b>ENVIRONMENTAL</b>	
<b>Operating Temperature</b>	0~+40°C
<b>Storage Temperature</b>	- 20~+60°C
<b>Relative Humidity</b>	(operating) 20~80% RH (storage) 10~90% RH

## RULE OF THE MODEL NAME

MODEL NAME	O/P VOLTAGE	O/P CURRENT	WATT
STD-1207	12V	7.0A	84W
STD-1506	15V	6.0A	90W
STD-1656	16V	5.6A	90W
STD-1805	18V	5.0A	90W

MODEL NAME	O/P VOLTAGE	O/P CURRENT	WATT
STD-1947	19V	4.74A	90W
STD-2045	20V	4.5A	90W
STD-2437	24V	3.75A	90W