

KEY FEATURES

- Fully Isolated Plastic Case with IP67 Level
- With Constant Current & Constant Voltage (C.C+C.V mode)
- With P.F.C. Function, PF>0.9
- High Efficiency up to 90%
- Free Air Convection
- Protections: Over Load / Over Voltage / Short Circuit
- High Reliability & Double Layered PCB
- Suitable for LED lighting and moving sign applications
- Isolation Class II
- 3-Years Product Warranty


IP67 CE

ELECTRICAL SPECIFICATIONS


All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.		PSF75-24S	PSF75-36S	PSF75-48S	PSF75-54S
Max output wattage (W)		75.6W	75.6W	75.36W	75.6W
Input	Voltage (Note2)	90-295 VAC			
	Frequency (Hz)	50 / 60 Hz			
	Power factor	PF>0.9 at Full load (115 VAC / 230 VAC)			
	Current (Full load)	11A (115 VAC) / 0.55A (230 VAC)			
	Inrush current	45 A max.			
	Leakage Current	< 0.7 mA max at 240 VAC			
Output	Voltage (V.DC.)	24V	36V	48V	54V
	Voltage ADJ Range Setup (CV Mode)	22 ~ 27V	33 ~ 40V	44 ~ 52V	49 ~ 56V
	Constant Current Operation Voltage (max) (CC Mode) (Note3)	15.6~ 24 VDC	23.4~36 VDC	36~48 VDC	35.1~54 VDC
	Voltage Tolerance	±10%			
	Preset Current (mA) (CC Mode) (fixed) (at 230 VAC)	2800 (2000~3150)	2100 (1350~2100)	1400 (1000~1570)	1400 (900~1400)
	Minimum Load (mA)	2000	1350	1000	900
	Line Regulation (typ.)	±4%			
	Load Regulation (Min-Max) (typ.)	±5%			
	Ripple & Noise (typ.) (Note1)	2.7Vp-p	5Vp-p		
	Efficiency (at 230VAC / Full Load)(typ)	89%	90%	89%	90%
Protection	Over current protection	Auto recovery			
	Over voltage protection	Zener diode clamp			
	Short circuit protection	Auto recovery			
Isolation	Input-Output (V.AC)	3750V			
Environment	Operating temperature	-30°C...+70°C (with derating)			
	Storage temperature	-40°C...+85°C			
	Temperature coefficient	0.02%/°C			
	Humidity	95% RH			
	MTBF	>450,000 h @ 25°C (MIL-HDBK-217F)			
Physical	Dimension (L x W x H)	5.67 x 2.76 x 1.48 Inches (144.0 x 70.0 x 37.5 mm) Tolerance ±2mm			
	Weight	Pending			
	Cooling method	Free air convection			
Safety	Agency Approvals	UL8750、IEC / EN 61347-2-13、IEC / EN 61347-1 (Pending)			
EMC	EMI (Conducted & Radiated Emission)	EN 55015 (Pending)			
	EMS (Noise Immunity)	EN 61547 (Pending)			
	Harmonic Current	EN 61000-3-2(at Full Load)、EN 61000-3-3 (Pending)			
	Surge	2KV L-N, 4KV L N-FG			



Note:

1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. Please check the derating curve for more details.
3. Input Voltage=115 or 230 VAC. This is the suitable operation region for LED related application.but please reconfirm special electrical requirements for some specific system design.

MECHANICAL DIMENSION (Top View)

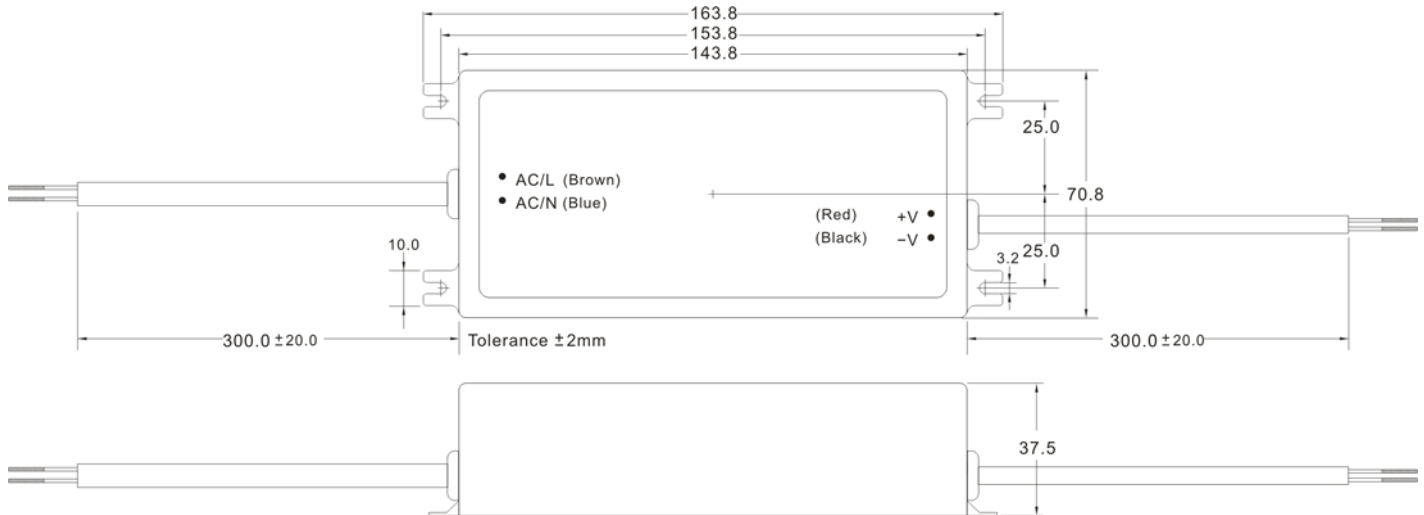

DERATING

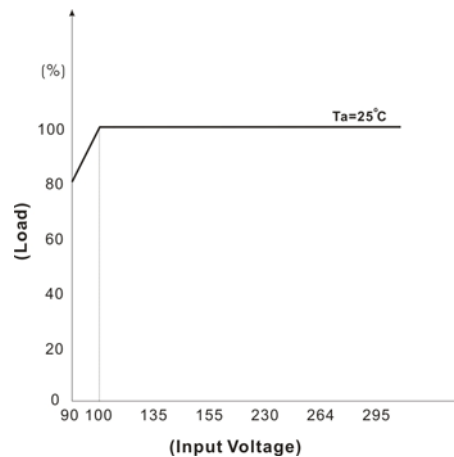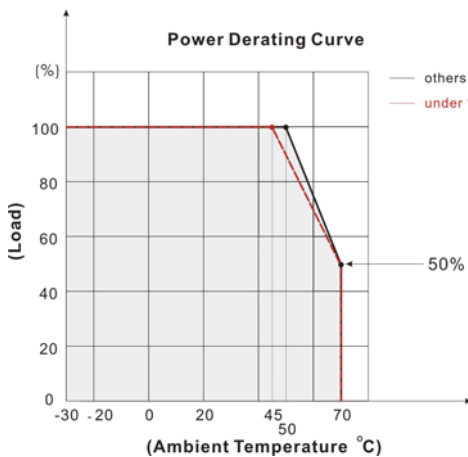

If the output is not connected LEDs, the input voltage must be greater than 180VAC.

BLOCK DIAGRAM

