



■ Features :

- True sine wave output (THD<3%)
- Power ON-OFF switch
- Low power "Power Saving Mode" to conserve energy
- RS-232 Interface / Remote Controls Port
- Built-in Voltage & WATT Meter & LED for power status
- Thermostatically Controlled Cooling Fan
- Protections: Bat. Low alarm/Bat. Low shutdown/Over voltage/Over temp./Output short/Input polarity reverse/Over load.
- Topology: Microprocessor
- Approvals: UL/ e13/ CE/ FCC
- 2 years warranty



**SPECIFICATION**





ORDER NO.	S1500-112B2	S1500-124B2	S1500-148B2	S1500-212E3	S1500-224E3	S1500-248E3																																																																													
<b>OUTPUT</b>	<table border="1"> <tr> <td>SAFETY MODEL NO.</td> <td>S1500-112</td> <td>S1500-124</td> <td>S1500-148</td> <td>S1500-212</td> <td>S1500-224</td> <td>S1500-248</td> </tr> <tr> <td>AC RATED VOLTAGE</td> <td>110V</td> <td>110V</td> <td>110V</td> <td>220V</td> <td>220V</td> <td>220V</td> </tr> <tr> <td>AC VOLTAGE</td> <td colspan="3">100 / 110 / 120 selectable by DIP switch</td> <td colspan="3">220 / 230 / 240 selectable by DIP switch</td> </tr> <tr> <td>RATED POWER</td> <td colspan="6">1500W</td> </tr> <tr> <td>SURGE POWER</td> <td colspan="6">2000W</td> </tr> <tr> <td>WAVEFORM</td> <td colspan="6">True sine wave (THD&lt;3%)</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="3">60Hz±0.1%</td> <td colspan="3">50Hz±0.1%</td> </tr> <tr> <td>AC REGULATION</td> <td colspan="3">-10~+4%</td> <td colspan="3">-10~+4%</td> </tr> <tr> <td>STANDARD RECEPTACLES</td> <td colspan="3">TYPE-2* 2ea</td> <td colspan="3">TYPE-3* 1ea</td> </tr> <tr> <td>POWER SAVING RECOVERY</td> <td colspan="6">5s</td> </tr> <tr> <td>LED INDICATOR</td> <td colspan="6">O.V.P, U.V.P, O.T.P, O.L.P and Saving mode status</td> </tr> </table>						SAFETY MODEL NO.	S1500-112	S1500-124	S1500-148	S1500-212	S1500-224	S1500-248	AC RATED VOLTAGE	110V	110V	110V	220V	220V	220V	AC VOLTAGE	100 / 110 / 120 selectable by DIP switch			220 / 230 / 240 selectable by DIP switch			RATED POWER	1500W						SURGE POWER	2000W						WAVEFORM	True sine wave (THD<3%)						FREQUENCY	60Hz±0.1%			50Hz±0.1%			AC REGULATION	-10~+4%			-10~+4%			STANDARD RECEPTACLES	TYPE-2* 2ea			TYPE-3* 1ea			POWER SAVING RECOVERY	5s						LED INDICATOR	O.V.P, U.V.P, O.T.P, O.L.P and Saving mode status					
SAFETY MODEL NO.	S1500-112	S1500-124	S1500-148	S1500-212	S1500-224	S1500-248																																																																													
AC RATED VOLTAGE	110V	110V	110V	220V	220V	220V																																																																													
AC VOLTAGE	100 / 110 / 120 selectable by DIP switch			220 / 230 / 240 selectable by DIP switch																																																																															
RATED POWER	1500W																																																																																		
SURGE POWER	2000W																																																																																		
WAVEFORM	True sine wave (THD<3%)																																																																																		
FREQUENCY	60Hz±0.1%			50Hz±0.1%																																																																															
AC REGULATION	-10~+4%			-10~+4%																																																																															
STANDARD RECEPTACLES	TYPE-2* 2ea			TYPE-3* 1ea																																																																															
POWER SAVING RECOVERY	5s																																																																																		
LED INDICATOR	O.V.P, U.V.P, O.T.P, O.L.P and Saving mode status																																																																																		
<b>INPUT</b>	<table border="1"> <tr> <td>DC CURRENT</td> <td>150A</td> <td>75A</td> <td>40A</td> <td>150A</td> <td>75A</td> <td>40A</td> </tr> <tr> <td>NO LOAD CURRENT DRAW</td> <td colspan="6">≤12W @ non-saving mode, ≤1.5W @ saving mode</td> </tr> <tr> <td>DC VOLTAGE</td> <td>12V</td> <td>24V</td> <td>48V</td> <td>12V</td> <td>24V</td> <td>48V</td> </tr> <tr> <td>VOLTAGE RANGE</td> <td>10.5 ~ 16VDC</td> <td>21 ~ 32VDC</td> <td>42 ~ 62VDC</td> <td>10.5 ~ 16VDC</td> <td>21 ~ 32VDC</td> <td>42 ~ 62VDC</td> </tr> <tr> <td>EFFICIENCY (Typ.)</td> <td>85%</td> <td>87%</td> <td>88%</td> <td>86%</td> <td>89%</td> <td>90%</td> </tr> <tr> <td>DC CONNECTOR</td> <td colspan="6">None</td> </tr> <tr> <td>FUSE</td> <td>40A* 6</td> <td>20A*6</td> <td>10A*6</td> <td>40A*6</td> <td>20A*6</td> <td>10A*6</td> </tr> </table>						DC CURRENT	150A	75A	40A	150A	75A	40A	NO LOAD CURRENT DRAW	≤12W @ non-saving mode, ≤1.5W @ saving mode						DC VOLTAGE	12V	24V	48V	12V	24V	48V	VOLTAGE RANGE	10.5 ~ 16VDC	21 ~ 32VDC	42 ~ 62VDC	10.5 ~ 16VDC	21 ~ 32VDC	42 ~ 62VDC	EFFICIENCY (Typ.)	85%	87%	88%	86%	89%	90%	DC CONNECTOR	None						FUSE	40A* 6	20A*6	10A*6	40A*6	20A*6	10A*6																												
DC CURRENT	150A	75A	40A	150A	75A	40A																																																																													
NO LOAD CURRENT DRAW	≤12W @ non-saving mode, ≤1.5W @ saving mode																																																																																		
DC VOLTAGE	12V	24V	48V	12V	24V	48V																																																																													
VOLTAGE RANGE	10.5 ~ 16VDC	21 ~ 32VDC	42 ~ 62VDC	10.5 ~ 16VDC	21 ~ 32VDC	42 ~ 62VDC																																																																													
EFFICIENCY (Typ.)	85%	87%	88%	86%	89%	90%																																																																													
DC CONNECTOR	None																																																																																		
FUSE	40A* 6	20A*6	10A*6	40A*6	20A*6	10A*6																																																																													
<b>PROTECTION</b>	<table border="1"> <tr> <td>BAT. LOW ALARM</td> <td>10.5±0.5V</td> <td>21±1V</td> <td>42±2V</td> <td>10.5±0.5V</td> <td>21±1V</td> <td>42±2V</td> </tr> <tr> <td>BAT. LOW SHUTDOWN</td> <td>10±0.5V</td> <td>20±1V</td> <td>40±2V</td> <td>10±0.5V</td> <td>20±1V</td> <td>40±2V</td> </tr> <tr> <td>OVER LOAD</td> <td colspan="6">&gt;1700W Shut down o/p voltage, re-power on to recover</td> </tr> <tr> <td>OVER VOLTAGE</td> <td>16~18V</td> <td>32~34V</td> <td>62~64V</td> <td>16~18V</td> <td>32~34V</td> <td>62~64V</td> </tr> <tr> <td>OVER TEMPERATURE</td> <td colspan="6">85°C ±5°C / 185±40°F, Reset: re-power on</td> </tr> <tr> <td>OUTPUT SHORT</td> <td colspan="6">Shut-off, Reset: re-power on</td> </tr> <tr> <td>BAT. POLARITY</td> <td colspan="6">By fuse open</td> </tr> </table>						BAT. LOW ALARM	10.5±0.5V	21±1V	42±2V	10.5±0.5V	21±1V	42±2V	BAT. LOW SHUTDOWN	10±0.5V	20±1V	40±2V	10±0.5V	20±1V	40±2V	OVER LOAD	>1700W Shut down o/p voltage, re-power on to recover						OVER VOLTAGE	16~18V	32~34V	62~64V	16~18V	32~34V	62~64V	OVER TEMPERATURE	85°C ±5°C / 185±40°F, Reset: re-power on						OUTPUT SHORT	Shut-off, Reset: re-power on						BAT. POLARITY	By fuse open																																	
BAT. LOW ALARM	10.5±0.5V	21±1V	42±2V	10.5±0.5V	21±1V	42±2V																																																																													
BAT. LOW SHUTDOWN	10±0.5V	20±1V	40±2V	10±0.5V	20±1V	40±2V																																																																													
OVER LOAD	>1700W Shut down o/p voltage, re-power on to recover																																																																																		
OVER VOLTAGE	16~18V	32~34V	62~64V	16~18V	32~34V	62~64V																																																																													
OVER TEMPERATURE	85°C ±5°C / 185±40°F, Reset: re-power on																																																																																		
OUTPUT SHORT	Shut-off, Reset: re-power on																																																																																		
BAT. POLARITY	By fuse open																																																																																		
<b>ENVIRONMENT</b>	<table border="1"> <tr> <td>WORKING TEMP.</td> <td colspan="6">0 ~ +40°C</td> </tr> <tr> <td>WORKING HUMIDITY</td> <td colspan="6">20% ~ 90% RH non-condensing</td> </tr> <tr> <td>STORAGE TEMP., HUMIDITY</td> <td colspan="6">-30~+70°C / -22~+158°F, 10~95% RH</td> </tr> <tr> <td>TEMP. COEFFICIENT</td> <td colspan="6">±0.05% / °C (0~50°C)</td> </tr> </table>						WORKING TEMP.	0 ~ +40°C						WORKING HUMIDITY	20% ~ 90% RH non-condensing						STORAGE TEMP., HUMIDITY	-30~+70°C / -22~+158°F, 10~95% RH						TEMP. COEFFICIENT	±0.05% / °C (0~50°C)																																																						
WORKING TEMP.	0 ~ +40°C																																																																																		
WORKING HUMIDITY	20% ~ 90% RH non-condensing																																																																																		
STORAGE TEMP., HUMIDITY	-30~+70°C / -22~+158°F, 10~95% RH																																																																																		
TEMP. COEFFICIENT	±0.05% / °C (0~50°C)																																																																																		
<b>SAFETY &amp; EMC</b>	<table border="1"> <tr> <td>SAFETY STANDARDS</td> <td colspan="3">UL458</td> <td colspan="3">-----</td> </tr> <tr> <td>ISOLATION RESISTANCE</td> <td colspan="6">I/P-O/P:100M Ohms / 500VDC</td> </tr> <tr> <td>EMI CONDUCTION&amp;RADIATION</td> <td colspan="3">Compliance to FCC class B</td> <td colspan="3">Compliance to EN55022 class B, 72/ 245/ CEE, 95/ 54/ CE</td> </tr> <tr> <td>EMS IMMUNITY</td> <td colspan="3">-----</td> <td colspan="3">Compliance to EN61000-4-2,3, ENV50204</td> </tr> <tr> <td>LVD</td> <td colspan="3">-----</td> <td colspan="3">Compliance to EN60950</td> </tr> </table>						SAFETY STANDARDS	UL458			-----			ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC						EMI CONDUCTION&RADIATION	Compliance to FCC class B			Compliance to EN55022 class B, 72/ 245/ CEE, 95/ 54/ CE			EMS IMMUNITY	-----			Compliance to EN61000-4-2,3, ENV50204			LVD	-----			Compliance to EN60950																																												
SAFETY STANDARDS	UL458			-----																																																																															
ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC																																																																																		
EMI CONDUCTION&RADIATION	Compliance to FCC class B			Compliance to EN55022 class B, 72/ 245/ CEE, 95/ 54/ CE																																																																															
EMS IMMUNITY	-----			Compliance to EN61000-4-2,3, ENV50204																																																																															
LVD	-----			Compliance to EN60950																																																																															
<b>OTHERS</b>	<table border="1"> <tr> <td>MTBF</td> <td colspan="6">50Khrs min. MIL-HDBK-217F(25°C)</td> </tr> <tr> <td>DIMENSION</td> <td colspan="6">402*275*105mm (L*W*H)</td> </tr> <tr> <td>PACKING</td> <td colspan="6">7.0kg; 2pcs / 17kg / CARTON</td> </tr> <tr> <td>COOLING</td> <td colspan="6">by fan, ≥ 600W fan ON; ≤500W fan OFF</td> </tr> <tr> <td>APPLICATIONS</td> <td colspan="6">Home appliance, Power tools, Office and Portable equipment, Vehicle and Yacht ...etc.</td> </tr> </table>						MTBF	50Khrs min. MIL-HDBK-217F(25°C)						DIMENSION	402*275*105mm (L*W*H)						PACKING	7.0kg; 2pcs / 17kg / CARTON						COOLING	by fan, ≥ 600W fan ON; ≤500W fan OFF						APPLICATIONS	Home appliance, Power tools, Office and Portable equipment, Vehicle and Yacht ...etc.																																															
MTBF	50Khrs min. MIL-HDBK-217F(25°C)																																																																																		
DIMENSION	402*275*105mm (L*W*H)																																																																																		
PACKING	7.0kg; 2pcs / 17kg / CARTON																																																																																		
COOLING	by fan, ≥ 600W fan ON; ≤500W fan OFF																																																																																		
APPLICATIONS	Home appliance, Power tools, Office and Portable equipment, Vehicle and Yacht ...etc.																																																																																		

■ AC Output Receptacles (optional)


TYPE-1	TYPE-2	TYPE-3	TYPE-4	TYPE-5	TYPE-6
USA	USA	EUROPE	UNIVERSAL	AUSTRALIA	U.K

**Mechanical Specification**

Unit:mm

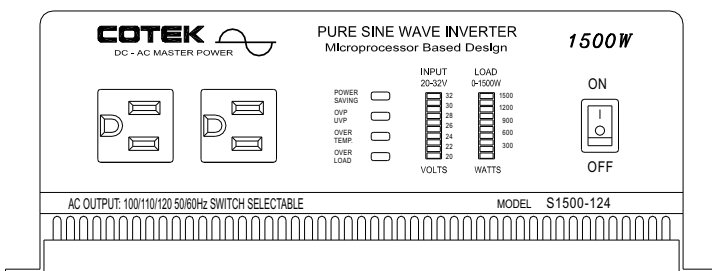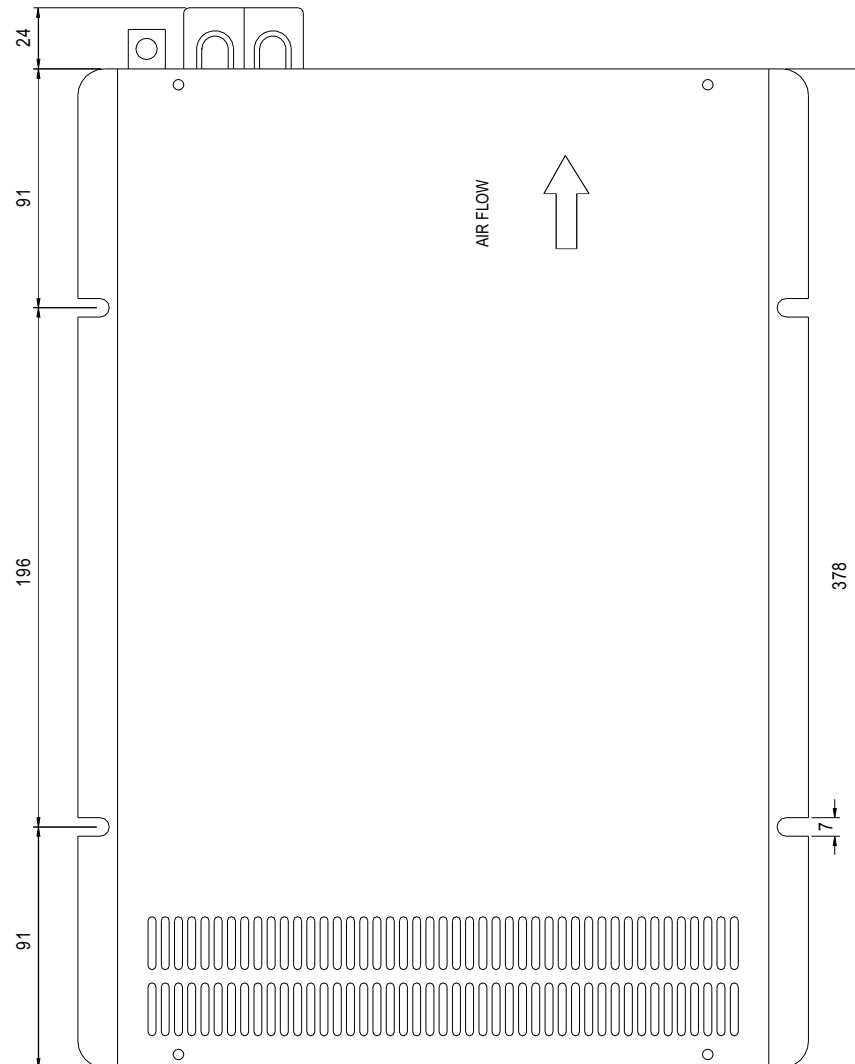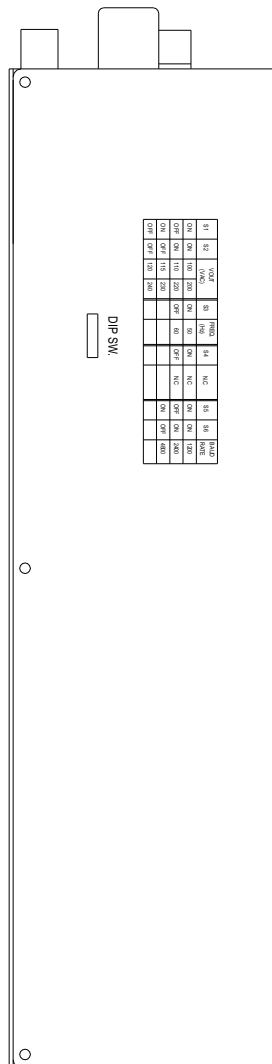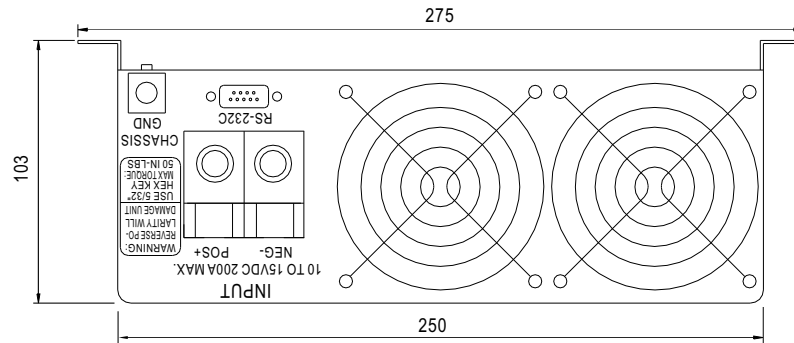

USA

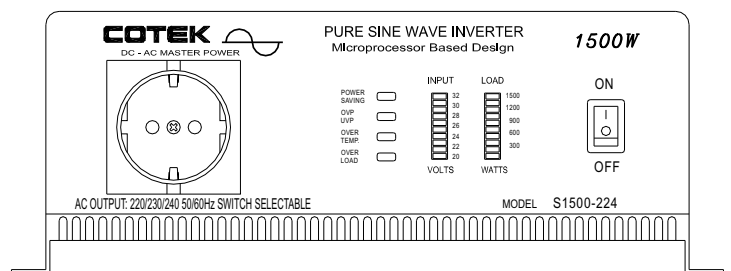

EUROPE